
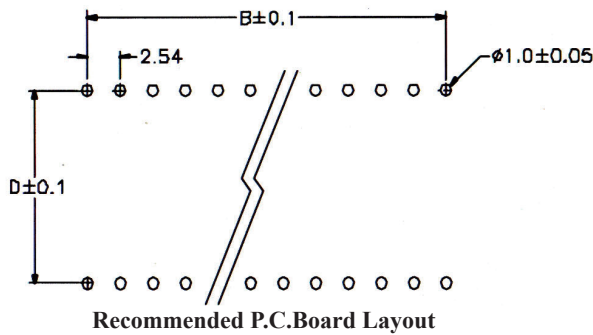
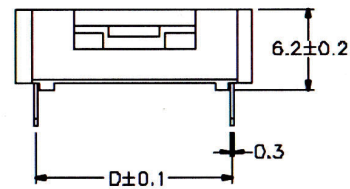
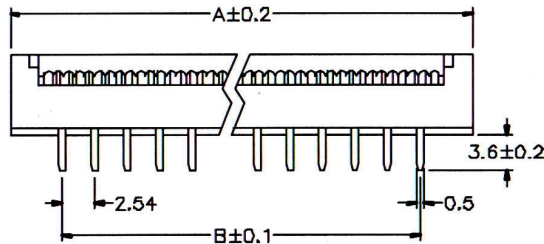


## 2.54MM x 7.62MM(0.100" x 0.300") & 2.54MM x 15.24MM (0.100" x 0.600") DIP PLUG

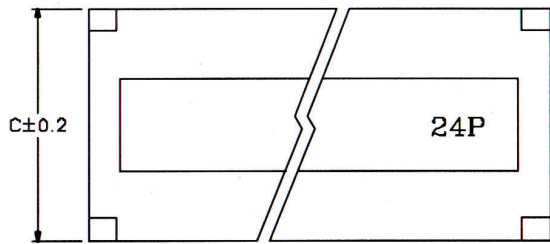

### SPECIFICATIONS

Current Rating: 3.0 Amp  
 Dielectric Withstanding: 500V AC  
 Insulation Resistance: 5000MΩ Min  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### MATERIALS

Insulation Material: P.B.T, UL94V-0  
 Contact Material: Phosphor Bronze  
 All materials must be RoHS compliant.

No. of Contacts	Dimensions(mm)				Code
	A	B	C	D	
08	14.25	7.62	10.60	7.62	254DV
10	16.68	10.16	10.60	7.62	
14	22.70	15.24	10.60	7.62	
16	25.10	17.78	10.60	7.62	
18	26.92	20.32	10.60	7.62	
20	29.70	22.86	10.60	7.62	
24	34.78	27.94	18.18	15.24	254DW
28	39.92	32.78	18.18	15.24	
32	44.40	37.86	18.18	15.24	
40	55.20	48.26	18.18	15.24	

### ORDERING INFORMATION:

P/N 254  $\frac{XX}{1}$  -  $\frac{XXX}{2}$   $\frac{T}{3}$   $\frac{B}{4}$

#### 1. DIMENSIONS:

"DV" 2.54MMx7.62MM(0.1"x0.3")  
 "DW" 2.54MMx15.24MM(0.1"x0.6")

#### 2. NO. OF CONTACTS:

008, 010, 014, 016, 018, 020, 024, 026,  
 028, 032, 034, 036, 040

#### 3. CONTACT FINISH:

"G" FULL GOLD PLATED  
 "S" SELECTIVE GOLD PLATED  
 "T" FULL TIN PLATED

#### 4. INSULATOR COLOR:

"B" BLACK (STANDARD)  
 "A" GRAY